

B1 隔离开关及熔断器

HGL 隔离器



选型指南

产品名称	派生型号	电流规格	极数	操作方式	辅助触点	观察窗	双投开关结构型式
HGL	Z	16	3	J	11	K	C
	↓	↓	↓	↓	↓	↓	↓
	缺省: 单投 开关 Z: 双投 开关 i: 6系列	16: 16A ... 3150: 3150A	3: 3P 4: 4P	缺省: 柜内 操作 J: 柜外 操作	缺省: 不带辅助 11: 带一对辅助 22: 带两对辅助	缺省: 不带 观察窗 K: 带观察窗	缺省: 上下型 C: 左右型

技术参数


电流规格	A	63 (16、25、32、40) , 100 (80) , 160 (125) , 250 (200) , 630 (315、400、500) , 1600 (800、1000、1250) 、 3150 (2000、2500)
电压	V	400, 690
认证标准		GB/T 14048.3 IEC 60947-3
认证证书		CCC

B1 隔离开关及熔断器


HGL 隔离器

外形及安装尺寸(mm)

- HGL、HGLi-80~100/3(4) 隔离开关外形及安装尺寸
与 HGL、HGLi-16~63/3(4) 隔离开关外形及安装尺寸

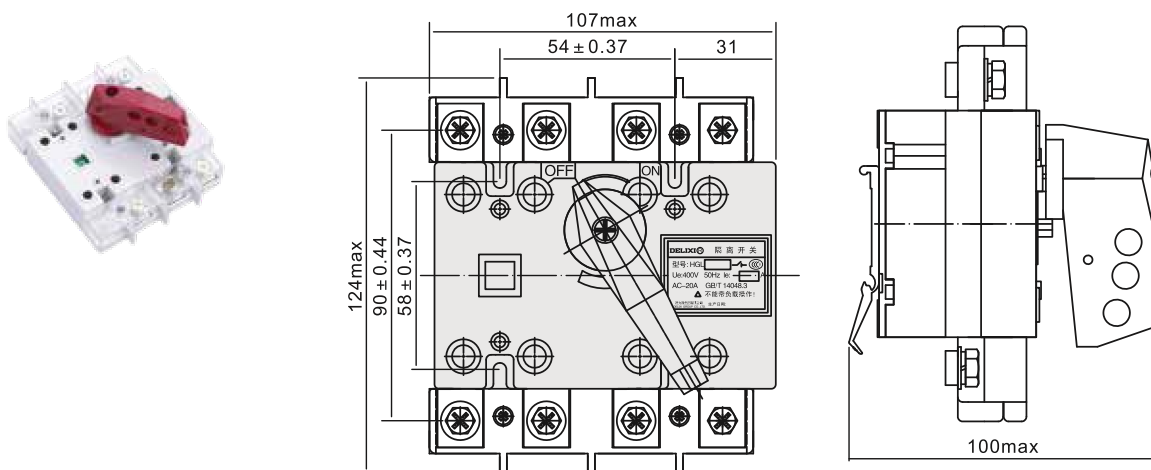

HGL、HGLi-80~100/3(4) 隔离开关外形及安装尺寸

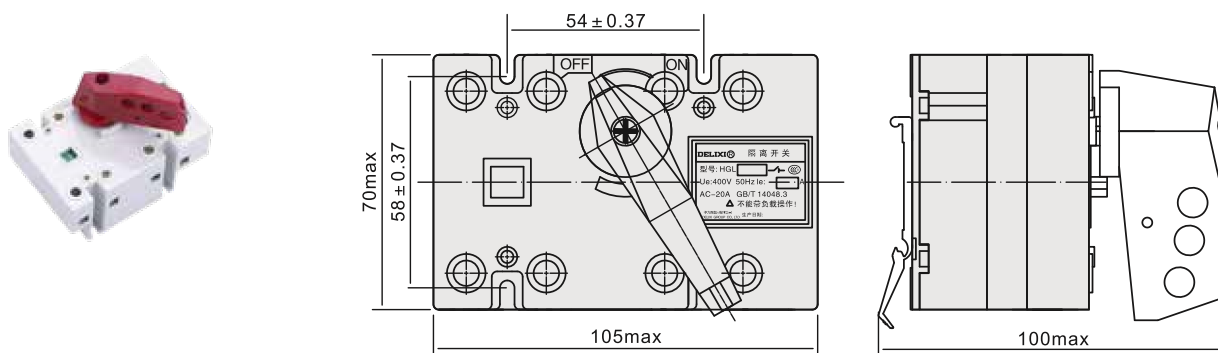


HGL、HGLi-16~63/3(4) 隔离开关外形及安装尺寸



B1 隔离开关及熔断器

HGL 隔离器


■ HGL、HGLi-125~630A 隔离开关外形及安装尺寸

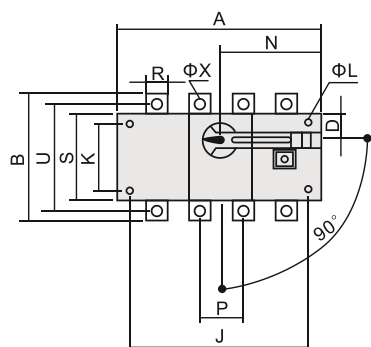


HGL、HGLi-125~630A 直接操作

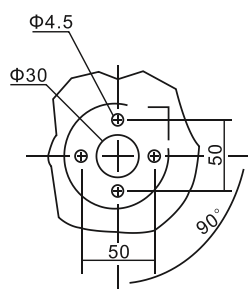

柜外手柄座安装尺寸

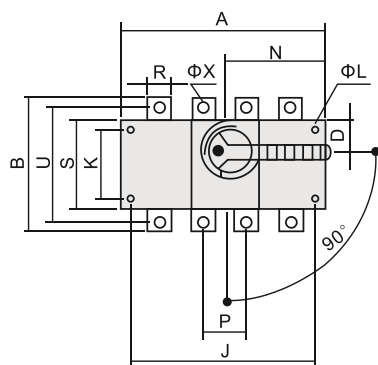

HGL、HGLi-125~630A/JK 柜外操作

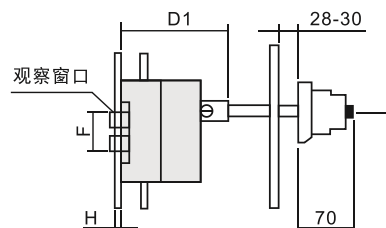


规格HGL、HGLi -125A~630A	外形尺寸与安装尺寸																		
	A	B	C	D	D1	E	φL	J	K	N	P	R	S	T	U	φx	Y	F	H
125A/3	140	135	120	27	92	73	5.5	120	65	85	36	20	85	3.5	115	9	25	53	10
125A/4	170	135	120	27	92	73	5.5	150	65	85	36	20	85	3.5	115	9	25	53	10
160A/3	140	135	120	27	92	73	5.5	120	65	85	36	20	85	3.5	115	9	25	53	10
160A/4	170	135	120	27	92	73	5.5	150	65	85	36	20	85	3.5	115	9	25	53	10
200A/3	180	170	138	35	98	86	6.5	160	90	115	50	25	115	3.5	140	11	25	80	15
200A/4	230	170	138	35	98	86	6.5	210	90	115	50	25	115	3.5	140	11	25	80	15
250A/3	180	170	138	35	98	86	6.5	160	90	115	50	25	115	3.5	140	11	25	80	15
250A/4	230	170	138	35	98	86	6.5	210	90	115	50	25	115	3.5	140	11	25	80	15
315A/3	230	240	175	50	135	110	7	210	140	145	65	32	160	4.5	206	11	37	104	20
315A/4	290	240	175	50	135	110	7	270	140	145	65	32	160	4.5	206	11	37	104	20
400A/3	230	240	175	50	135	110	7	210	140	145	65	32	160	4.5	206	11	37	104	20
400A/4	290	240	175	50	135	110	7	270	140	145	65	32	160	4.5	206	11	37	104	20
500A/3	230	260	175	50	135	110	7	210	140	145	65	40	160	6	220	13	37	104	20
500A/4	290	260	175	50	135	110	7	270	140	145	65	40	160	6	220	13	37	104	20
630A/3	230	260	175	50	135	110	7	210	140	145	65	40	160	6	220	13	37	104	20
630A/4	290	260	175	50	135	110	7	270	140	145	65	40	160	6	220	13	37	104	20


B1 隔离开关及熔断器

HGL 隔离器


■ HGL、HGLi-800~1600A 隔离开关外形及安装尺寸

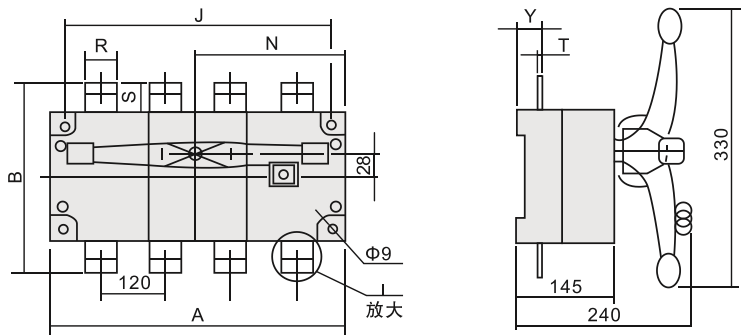


HGL、HGLi-800~1600A





800~1000A




1250~1600A

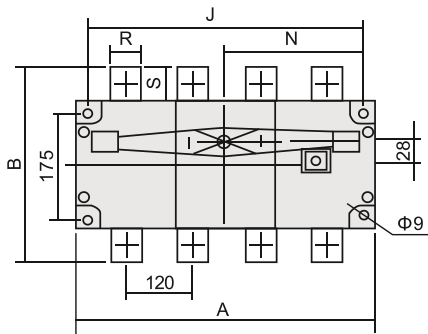

HGL、HGLi-800~1600A/J



A 型柜外手柄座安装尺寸



B 型柜外手柄座安装尺寸


注：1、A 型手柄总长 405，B 型手柄总长 330；
2、普通为 A 型手柄，如需 B 型手柄可单独定制。

B1 隔离开关及熔断器

HGL 隔离器

规格 HGL-800A~1600A HGLi-800A~1600A	外形尺寸与安装尺寸							
	A	B	J	N	R	S	T	Y
800~1000A/3	378	312	353	185	60	56	8	48
800~1000A/4	498	312	473	245	60	56	8	48
1250A/3	378	360	353	185	80	78	8	48
1250A/4	498	360	473	245	80	78	8	48
1600A/3	378	360	353	185	80	78	10	49
1600A/4	498	360	473	245	80	78	10	49

■ HGL-2000~3150A 隔离开关外形及安装尺寸

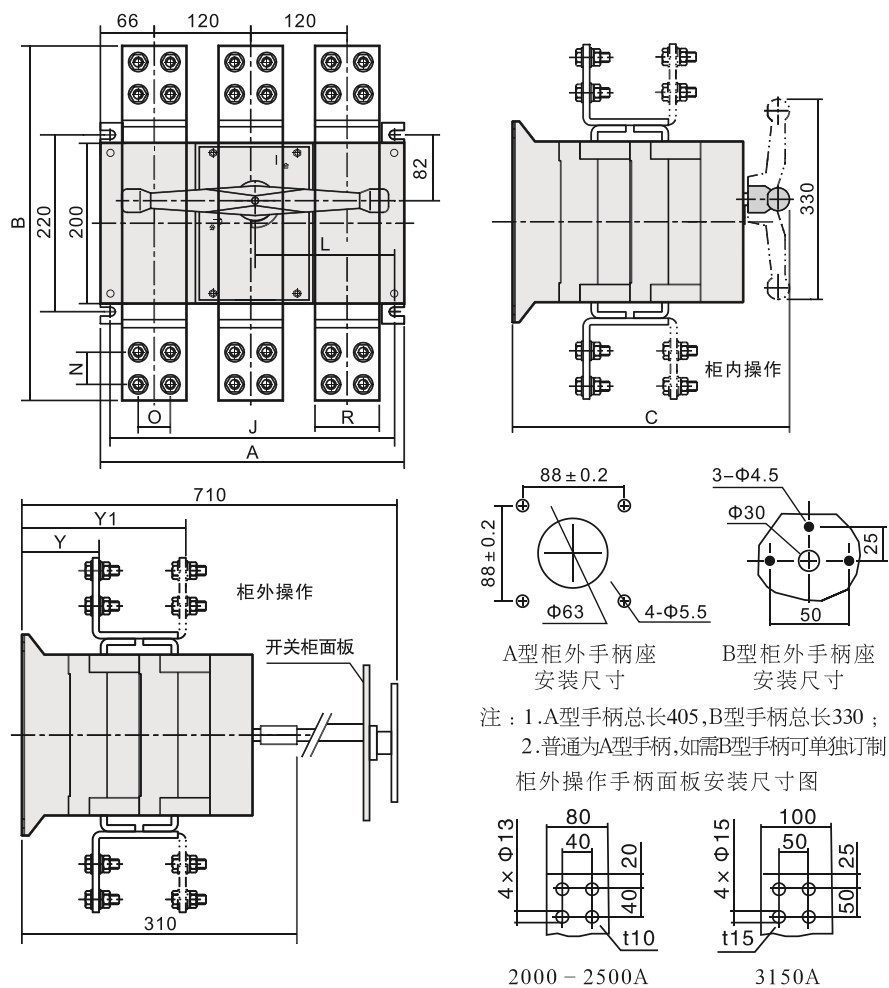

规格电流	HGL-2000、2500/3150柜内及柜外隔离安装尺寸(mm)									
	A	B	C	L	J	N	O	R	Y	Y1
2000A/3	378	440	374	173.5	350	40	40	80	92	225
2500A/3	378	440	374	173.5	350	40	40	80	92	225
3150A/3	378	510	374	173.5	350	50	50	100	76	245
2000A/4	500	440	374	235	473	40	40	80	92	225
2500A/4	500	440	374	235	473	40	40	80	92	225
3150A/4	500	510	374	235	473	50	50	100	76	245