

B1 隔离开关及熔断器

RT16A 熔断体

选型指南



产品名称	规格	类型	额定电流	
RT16A	00	T	2	
A:撞击器	00:00型	T:熔断体	2:2A	80:80A
	1:1型		4:4A	100:100A
	2:2型		6:6A	125:125A
	3:3型		8:8A	160:160A
			10:10A	200:200A
			12:12A	224:224A
			16:16A	250:250A
			20:20A	315:315A
			25:25A	355:355A
			32:32A	400:400A
			40:40A	500:500A
			50:50A	630:630A
			63:63A	

B1 隔离开关及熔断器

RT16A 熔断体




产品名称	熔断器电流(A)	规格(尺码)	分断能力(kA)	额定耗散功率(W)	熔断体电流(A)	订货号
熔断体 RT16A-00(NTA00)	160	00	120kA/AC500V 50kA/AC690V 100kA/DC250V	≤12	2 4 6 8 10 12 16 20 25 32 40 50 63 80 100 125 160	RT16A00T2 RT16A00T4 RT16A00T6 RT16A00T8 RT16A00T10 RT16A00T12 RT16A00T16 RT16A00T20 RT16A00T25 RT16A00T32 RT16A00T40 RT16A00T50 RT16A00T63 RT16A00T80 RT16A00T100 RT16A00T125 RT16A00T160
熔断体 RT16A-1(NTA1)	250	1	120kA/AC500V 50kA/AC690V 100kA/DC440V	≤32	80 100 125 160 200 224 250	RT16A1T80 RT16A1T100 RT16A1T125 RT16A1T160 RT16A1T200 RT16A1T224 RT16A1T250
熔断体 RT16A-2(NTA2)	400	2	120kA/AC500V 50kA/AC690V 50kA/DC440V	≤45	125 160 200 224 250 315 355 400	RT16A2T125 RT16A2T160 RT16A2T200 RT16A2T224 RT16A2T250 RT16A2T315 RT16A2T355 RT16A2T400
熔断体 RT16A-3(NTA3)	630	3	120kA/AC500V 50kA/AC690V 50kA/DC440V	≤60	315 355 400 500 630	RT16A3T315 RT16A3T355 RT16A3T400 RT16A3T500 RT16A3T630



B1 隔离开关及熔断器

RT16A 熔断体

外形及安装尺寸(mm)

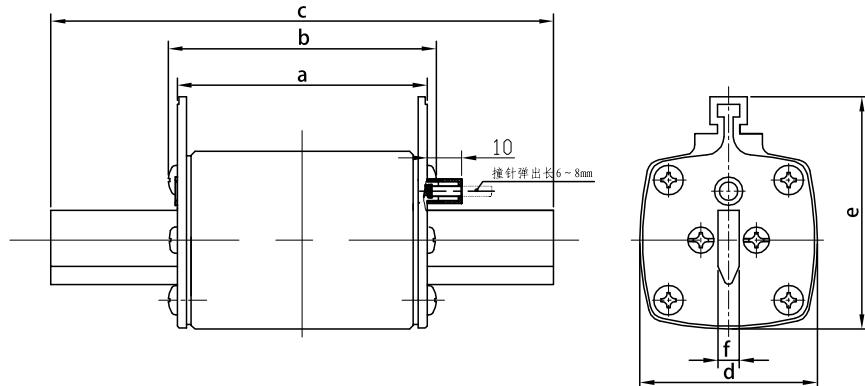

RT 16A刀型触头熔断体的外形尺寸图

型号	a	b	c	d	e	f
RT16A-00	49	54	78.5	29	57	6
RT16A-1	67	72	136	48	62	6
RT16A-2	67	72	150	59	73	6
RT16A-3	67	72	150	67	85	6